

Table of Contents

Table of Contents	i
Preface.....	- 1 -
101 - Terms, Format, and Definitions.....	- 2 -
101.01 Meaning of Terms.....	- 2 -
101.03 Abbreviations.....	- 2 -
101.04 Definitions.....	- 2 -
102 - Bid, Award, and Execution of Contract	- 5 -
102 Bid, Award, and Execution of Contract.....	- 5 -
103 - Scope of Work	- 6 -
Deletions	- 6 -
104 - Control of Work.....	- 7 -
Deletions	- 7 -
104.06 Use of Roads by Contractor.....	- 7 -
105 - Control of Material	- 8 -
105.02 Material Sources.	- 8 -
105.02(a) Government-provided sources.....	- 8 -
105.05 Use of Material Found in the Work.	- 8 -
106 - Acceptance of Work	- 9 -
106.07 Delete	- 9 -
107 - Legal Relations and Responsibility to the Public	- 10 -
107.05 Responsibility for Damage Claims.	- 10 -
107.06 Contractor's Responsibility for Work.....	- 10 -
107.09 Legal Relationship of the Parties.	- 10 -
107.10 Environmental Protection.	- 10 -
108 - Prosecution and Progress.....	- 12 -
108 Delete.	- 12 -
109 - Measurement and Payment.....	- 13 -
109 Deletions	- 13 -
109.02 Measurement Terms and Definitions.....	- 13 -

Forest Service Supplemental Specifications to FP-03 for GTR Dunn Timber Sale

109.02 Measurement Terms and Definitions.....	- 13 -
151 - Mobilization.....	- 15 -
155 - Schedules for Construction Contracts	- 17 -
155 Delete.	- 17 -
157 - Soil Erosion Control	- 18 -
157.02 Materials	- 18 -
157.03 General.....	- 18 -
157.08 Water Crossings.	- 18 -
157.09 Diversions.	- 19 -
157.02 Materials	- 19 -
157.03 General.....	- 19 -
201 - Clearing and Grubbing	- 21 -
201.02 Material:	- 21 -
201.01 Description.....	- 21 -
201.04 Clearing. (c)	- 21 -
201.06 Disposal.....	- 22 -
203 - Removal of Structures and Obstructions	- 23 -
203.03 Salvaging Material.	- 23 -
203.05 Disposing of Material.	- 23 -
203.01 Description.....	- 23 -
203.03 Salvaging Material	- 23 -
203.04 Removing Material.	- 24 -
203.05 Disposing of Material.	- 24 -
203.05 Disposing of Material.	- 24 -
203.05 Disposing of Material.	- 25 -
204 - Excavation and Embankment	- 27 -
204.06 Roadway Excavation	- 39 -
204.11 Compaction.....	- 39 -
204.14 Disposal of Unsuitable or Excess Material.	- 40 -
204.15 Acceptance.....	- 40 -
204.13 Sloping, Shaping, and Finishing.	- 41 -

Forest Service Supplemental Specifications to FP-03 for GTR Dunn Timber Sale

Table 204-2 Construction tolerances.	- 41 -
204.14 Disposal of Unsuitable or Excess Material.	- 42 -
204.15 Acceptance.	- 42 -
Table 204-1 Sampling and Testing Requirements.	- 42 -
204.16 Measurement.	- 42 -
208 - Structure Excavation and Backfill for Selected Major Structures.	- 43 -
208.04 General.	- 43 -
209 - Structure Excavation and Backfill.	- 45 -
209.07 Dewatering.	- 45 -
209.10 Backfill.	- 45 -
209.11 Compacting.	- 46 -
209.12 Acceptance.	- 46 -
209.13 See Subsection 109.05.	- 46 -
209.11 Compacting.	- 47 -
209.12 Acceptance.	- 47 -
230 - Roadside Brushing.	- 48 -
251 - Riprap.	- 52 -
251.01 Description.	- 52 -
251.02 Material.	- 52 -
251.07 Acceptance.	- 52 -
251.09 Payment.	- 52 -
301 - Untreated Aggregate Courses.	- 53 -
301 Title Change.	- 53 -
301.01 Work.	- 53 -
301.02 Material.	- 53 -
301.03 General.	- 53 -
301.04 Mixing and Spreading.	- 54 -
301.05 Compacting.	- 54 -
301.05 Compacting.	- 55 -
301.06 Surface Tolerance.	- 56 -
301.08(b) Plasticity Index.	- 56 -

Forest Service Supplemental Specifications to FP-03 for GTR Dunn Timber Sale

Table 301-1	- 56 -
301.09 Measurement.....	- 57 -
303 - Road Reconditioning	- 58 -
303.03 Ditch Reconditioning	- 61 -
303.04 Shoulder Reconditioning	- 61 -
303.05 Roadbed Reconditioning.....	- 61 -
303.07 Roadway Reconditioning.....	- 62 -
303.09 Acceptance	- 62 -
303.10 Measurement.....	- 62 -
306 - Dust Palliative.....	- 63 -
306.03 General.....	- 63 -
306.04 Preparation and Application.	- 63 -
306.06 Acceptance.....	- 63 -

Forest Service Supplemental Specifications to FP-03 for GTR Dunn Timber Sale

Table 306-1—Sampling and Testing	64
322 - Minor Aggregate Courses	66
602 - Culverts and Drains	73
602.03 General	73
602.05 Laying Metal Pipe	73
602.03 General	73
625 - Turf Establishment.....	74
625.3 General.....	74
625.4 Preparing Seedbed.....	74
625.5 Watering.....	74
625.6 Fertilizing.....	74
625.7 Seeding.....	75
625.8 Mulching.....	75
625.9 Protecting and Caring for Seeded Areas.	75
625.11 Measurement.....	75
705 - Rock.....	77
705.02 Riprap Rock	77
718 - Traffic Signing and Marking Material	78
718.05 Aluminum Panels.....	78

Preface

Delete all but the first paragraph and add the following:

The Forest Service, US Department of Agriculture has adopted FP-03 for construction of National Forest System Roads.

101 - Terms, Format, and Definitions

101.00_nat_us_07_25_2005

101.01_nat_us_01_22_2009

101.01 Meaning of Terms

Delete all references to the TAR (Transportation Acquisition Regulations) in the specifications.

101.03_nat_us_06_16_2006

101.3 Abbreviations.

Add the following to (a) Acronyms:

AFPA	American Forest and Paper Association
MSHA	Mine Safety and Health Administration
NIST	National Institute of Standards and Technology
NESC	National Electrical Safety Code
WCLIB	West Coast Lumber Inspection Bureau

.

Add the following to (b) SI symbols:

mp	Milepost
ppm	Part Per Million

101.04_nat_us_03_29_2007

101.4 Definitions.

Delete the following definitions and substitute the following:

Bid Schedule--The Schedule of Items.

Bridge--No definition.

Contractor--The individual or legal entity contracting with the Government for performance of prescribed work. In a timber sale contract, the contractor is the “purchaser”.

Culvert--No definition.

Forest Service Supplemental Specifications to FP-03 for GTR Dunn Timber Sale

Right-of-Way--A general term denoting (1) the privilege to pass over land in some particular line (including easement, lease, permit, or license to occupy, use, or traverse public or private lands), or (2) Real property necessary for the project, including roadway, buffer areas, access, and drainage areas.

Add the following:

Adjustment in Contract Price--“Equitable adjustment,” as used in the Federal Acquisition Regulations, or “construction cost adjustment,” as used in the Timber Sale Contract, as applicable.

Change--“Change” means “change order” as used in the Federal Acquisition Regulations, or “design change” as used in the Timber Sale Contract.

Design Quantity--“Design quantity” is a Forest Service method of measurement from the FS-96 *Forest Service Specifications for the Construction of Roads and Bridges*. Under these FP specifications this term is replaced by the term “Contract Quantities”.

Forest Service--The United States of America, acting through the Forest Service, U.S. Department of Agriculture.

Neat Line--A line defining the proposed or specified limits of an excavation or structure.

Pioneer Road--Temporary construction access built along the route of the project.

Purchaser--The individual, partnership, joint venture, or corporation contracting with the Government under the terms of a Timber Sale Contract and acting independently or through agents, employees, or subcontractors.

Protected Streamcourse--A drainage shown on the plans or timber sale area map that requires designated mitigation measures.


Road Order--An order affecting and controlling traffic on roads under Forest Service jurisdiction. Road Orders are issued by a designated Forest Officer under the authorities of 36 CFR, part 260.

Schedule of Items--A schedule in the contract that contains a listing and description of construction items, quantities, units of measure, unit price, and amount.

Utilization Standards--The minimum size and percent soundness of trees described in the specifications to determine merchantable timber.

Add Figure 101-1—Illustration of road structure terms:

Figure 101-1—Illustration of road structure terms.

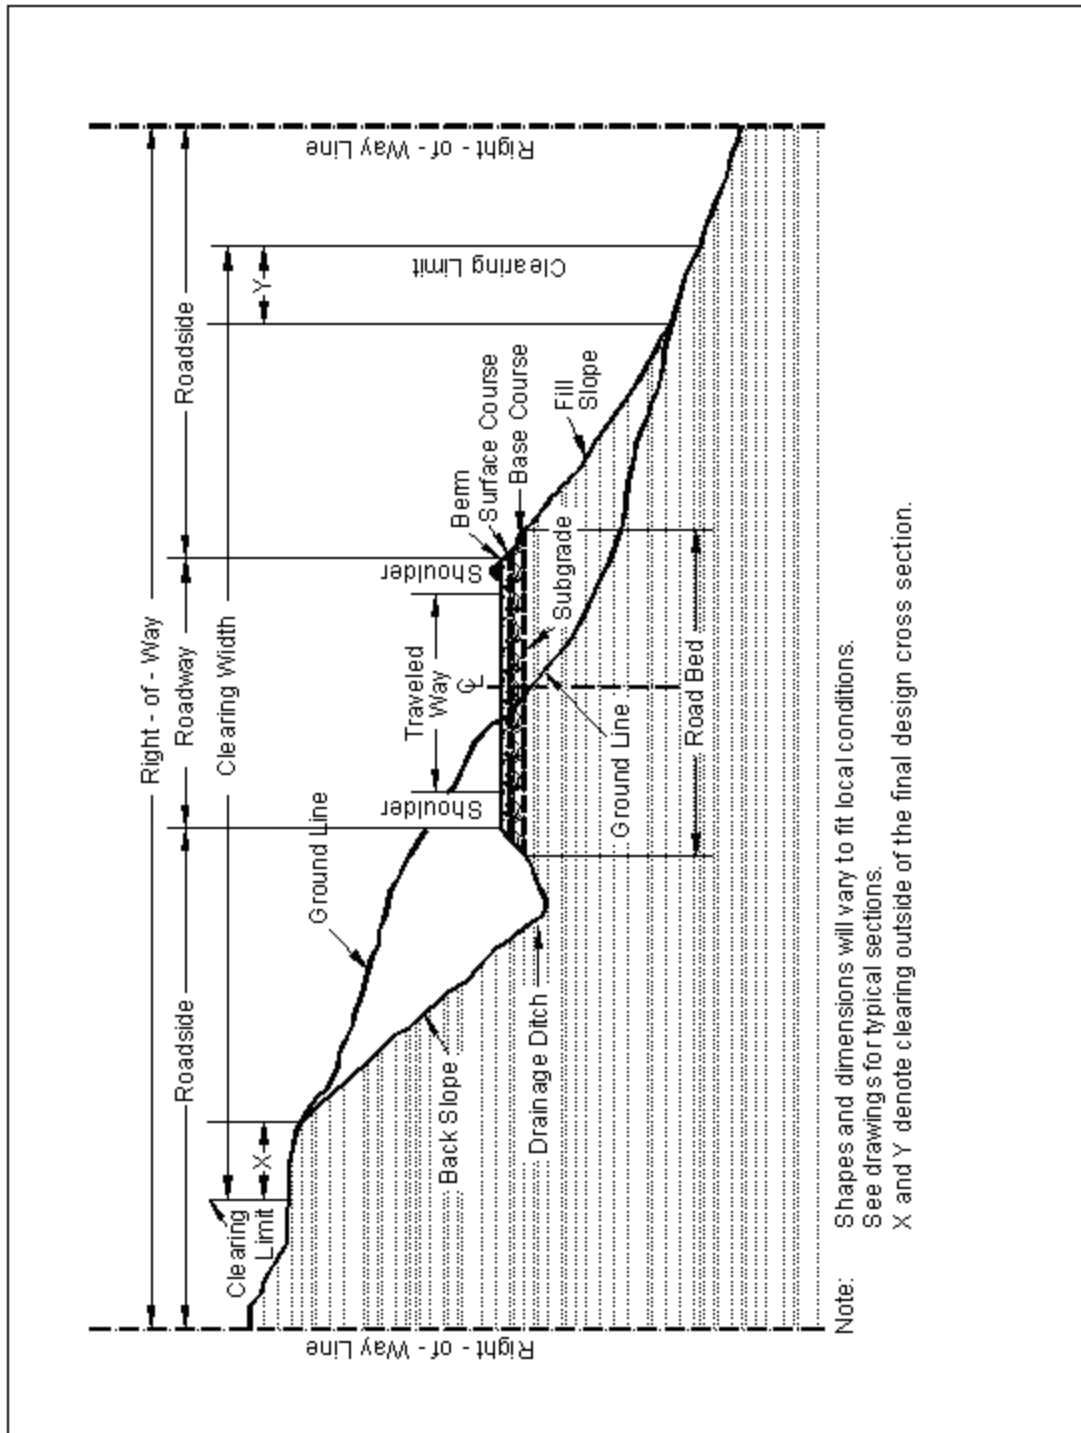

102 - Bid, Award, and Execution of Contract

102.00_nat_us_02_16_2005

102 Bid, Award, and Execution of Contract

Delete Section 102 in its entirety.

103 - Scope of Work

103.00_nat_us_02_16_2005

Deletions

Delete all but subsection 103.01 Intent of Contract.

104 - Control of Work

104.00_nat_us_06_16_2006

Deletions

Delete Sections 104.01, 104.02, and 104.04.

104.06_nat_us_02_17_2005

Add the following subsection:

104.06 Use of Roads by Contractor

The Contractor is authorized to use roads under the jurisdiction of the Forest Service for all activities necessary to complete this contract, subject to the limitations and authorizations designated in the Road Order(s) or described in the contract, when such use will not damage the roads or national forest resources, and when traffic can be accommodated safely.

105 - Control of Material

105.02_nat_us_01_18_2007

105.02 Material Sources.

105.02(a) Government-provided sources.

Add the following:

Comply with the requirements of 30 CFR 56, subparts B and H. Use all suitable material for aggregate regardless of size unless otherwise designated. When required, re-establish vegetation in disturbed areas according to section 625.

105.05_nat_us_05_12_2004

105.05 Use of Material Found in the Work.

Delete 105.05 (a) and (b) and the last sentence of the second paragraph and substitute the following:

Materials produced or processed from Government lands in excess of the quantities required for performance of this contract are the property of the Government. The Government is not obligated to make reimbursement for the cost of producing these materials.

106 - Acceptance of Work

106.07_nat_us_05_11_2004

106.07 Delete

Delete subsection 106.07.

107 - Legal Relations and Responsibility to the Public

107.05_nat_us_05_11_2004

107.5 Responsibility for Damage Claims.

Delete the entire subsection.

107.06_nat_us_06_16_2006

107.6 Contractor's Responsibility for Work.

Delete the following from the first paragraph.

“except as provided in Subsection 106.07”.

107.09_nat_us_06_16_2006

107.9 Legal Relationship of the Parties.

Delete the entire subsection.

107.10_nat_us_06_16_2006

107.10 Environmental Protection.

Add the following:

Design and locate equipment repair shops, stationary refueling sites, or other facilities to minimize the potential and impacts of hazardous material spills on Government land.

Before beginning any work, submit a Hazardous Spill Plan. List actions to be taken in the event of a spill. Incorporate preventive measures to be taken, such as the location of mobile refueling facilities, storage and handling of hazardous materials, and similar information. Immediately notify the CO of all hazardous material spills. Provide a written narrative report form no later than 24 hours after the initial report and include the following:

- Description of the item spilled (including identity, quantity, manifest number, and other identifying information).
- Whether amount spilled is EPA or state reportable, and if so whether it was reported, and to whom.
- Exact time and location of spill including a description of the area involved.
- Containment procedures.
- Summary of any communications the Contractor had with news media, Federal, state and local regulatory agencies and officials, or Forest Service officials.
- Description of clean-up procedures employed or to be employed at the site including final disposition and disposal location of spill residue.

Forest Service Supplemental Specifications to FP-03 for GTR Dunn Timber Sale

When available provide copies of all spill related clean up and closure documentation and correspondence from regulatory agencies.

The Contractor is solely responsible for all spills or leaks that occur during the performance of this contract. Clean up spills or leaks to the satisfaction of the CO and in a manner that complies with Federal, state, and local laws and regulations.

108 - Prosecution and Progress

108.00_nat_us_02_16_2005

108 Delete.

Delete Section 108 in its entirety.

109 - Measurement and Payment

109.00_nat_us_02_17_2005

109 Deletions

Delete the following entire subsections:

109.6 Pricing of Adjustments.

109.7 Eliminated Work.

109.8 Progress Payments.

109.9 Final Payment.

109.02_nat_us_06_16_2006

109.02 Measurement Terms and Definitions.

(b) Contract quantity.

Add the following:

Contract quantities will be adjusted only when there are errors in the original design of 15% or more.

Change the following:

“(b) Cubic yard” to “(c) Cubic yard”.

Add the following definition:

(p) Thousand Board Feet (Mbf). 1,000 board feet based on nominal widths, thickness, and extreme usable length of each piece of lumber or timber actually incorporated in the job. For glued laminated timber, 1,000 board feet based on actual width, thickness, and length of each piece actually incorporated in the job.

109.02_0114_us_06_09_2008

109.02 Measurement Terms and Definitions.

Add the following definition:

(q) Actual quantity. (AQ) These quantities are determined from measurements of completed work.

151 - Mobilization

151.00_01_us_10_11_2006

Delete Section 151 in its entirety and replace with the following.

Description

151.01 This work consists of moving personnel, equipment, material, and incidentals to the project and performing all work necessary before beginning work at the project site; obtaining of permits, insurance, and bonds. This work also includes washing and treating construction equipment and vehicles necessary for equipment transport to remove seeds, plants, and plant fragments before the equipment is used on Forest Service lands, according to the requirements within.

Construction Requirements

Wash the sides, tops, and undercarriages of all construction equipment. Remove all seeds, plants, plant fragments, dirt, and debris from the construction equipment. Only equipment inspected by the Forest Service will be allowed to operate within the project area. All subsequent move-ins of equipment to the project area will be treated in the same manner as the initial move-in. This requirement does not apply to cars, pickup trucks, and other vehicles that regularly travel between the construction site and areas off the National Forest.

Equipment will be considered free of soil, seed, and other such debris when a visual inspection does not disclose such material. Disassembly of equipment, components or the need for specialized inspection tools is not required.

Notify the CO in writing at least 72 hours before moving any construction equipment onto the national forest. Notification will include an agreed upon location where the equipment will be available for inspection by the Forest Service. Inspection will be required after every cleaning.

Use methods of cleaning and locations for cleaning approved by the CO.

For work at a commercial washing facility, use an approved facility.

New infestations of noxious weeds of concern to Forest Service and identified by either Contractor or Forest Service, in the Project Area or on the haul route, will be promptly reported to the other party. Contractor and Forest Service will agree on treatment methods to reduce or stop the spread of noxious weeds when new infestations are found. A current list of noxious weeds of concern to Forest Service is available at each Forest Service office.

151.02 Clean equipment prior to moving onto this project. The initial cleaning will not be included in the measurement for payment. Payment for cleaning will only be made if subsequent cleanings are ordered by the CO. Measurement shall be on an “each” basis, meaning one complete cleaning of all equipment required for this contract. Subsequent cleanings necessitated by the Contractor’s actions but not directed by the CO will not be included in the measurement for payment.

Measure mobilization according to Subsection 109.02.

Payment

151.3 The accepted quantity, measured as provided in Subsection 109.02, will be paid at the contract price per unit of measurement for the Section 151 pay item shown in the bid schedule. Payment will be full compensation for the work prescribed in this Section. See Subsection 109.05.

Progress payments for mobilization lump sum will be paid as follows:

- (a) If applicable, bond premiums will be reimbursed according to FAR Clause 52.232-5 Payments Under Fixed-Price Construction Contracts, after receipt of the evidence of payment.
- (b) When 5 percent of the original contract amount is earned from other bid items, 50 percent of the mobilization item, or 5 percent of the original contract amount, whichever is less, will be paid.
- (c) When 10 percent of the original contract amount is earned from other bid items, 100 percent of the mobilization item, or 10 percent of the original contract amount, whichever is less, will be paid.
- (d) Any portion of the mobilization item in excess of 10 percent of the original contract amount will be paid after final acceptance.

Include all costs associated with the initial cleaning of equipment in the unit bid price for Mobilization. Cleaning for subsequent move-ins will not be paid for unless after a suspension ordered by the CO.

155 - Schedules for Construction Contracts

155.00_nat_us_05_11_2004

155 Delete.

Delete Section 155 in its entirety.

157 - Soil Erosion Control

157.00_01_us_10_10_2006

157.2 Materials

Add the following:

Provide bales, wattles, logs and rolls from a certified noxious weed free source.

157.3 General.

Delete the first two paragraphs and replace with the following:

Prepare, file and submit storm water permits as required by the State with jurisdiction, including payment of necessary fees. The storm water permits shall be for____outfalls.

Submit an Erosion Control Plan detailing permanent and temporary control measures to minimize erosion and sedimentation during and after construction in accordance with the plans and storm water permits. Do not modify the type, size, or location of any control or practice without approval. Submit the erosion control plan proposal at least 7 days before operations begin to the CO for approval.

Reflect in the Erosion Control Plan special concerns and measures necessary to protect resources and government improvements. Include:

- (a) The construction activities and sequence of implementation relating to specific erosion control measures.
- (b) The location and type of permanent controls to be implemented during construction.
- (c) The location and type of temporary controls to be implemented during construction.
- (d) For work in stream channels with running water a detailed dewatering plan.
- (e) For work in stream channels without flowing water describe level of ground and vegetative disturbance and measures to reduce potential sediment delivery.
- (f) Description of the monitoring plan.

Add the following to the third paragraph:

Upon completion of construction at the site, remove all temporary erosion control devices, dewatering materials and equipment from Government property.

157.8 Water Crossings.

Add the following:

At any channel crossing where there is running water, dewater by rerouting water flow around the site before and during excavation and embankment operations.

157.9 Diversions.

Delete the first sentence and replace with the following:

When shown on the plans, construct temporary channels, temporary culverts, or sandbags to divert water around disturbed areas and slopes. Earthen dams are prohibited.

157.02_01_us_08_23_2004

157.2 Materials

Add the following:

Provide bales, wattles, logs and rolls from a certified noxious weed free source.

157.3 General

Add the following:

Prior to the start of construction, submit a written plan for review that provides permanent and temporary erosion control measures to minimize erosion and sedimentation during and after construction. Include methods to minimize disturbance to the stream and prevent runoff from the construction site entering directly into the stream. The “Soil Erosion Control Plan” must address construction activities that have the potential for stream sedimentation.

157.03_nat_us_02_24_2005

157.03 General

Delete the entire subsection and replace with the following:

Prior to the start of construction, submit a written plan that provides permanent and temporary erosion control measures to minimize erosion and sedimentation during and after construction. Do not begin work until the necessary controls for that particular phase of work have been implemented. Do not modify the type, size, or location of any control. An alternate erosion control plan with all necessary permits may be submitted 30 days before intended use.

Incorporate all permanent erosion control features into the project at the earliest practicable time, as outlined in the approved plan.

When erosion control measures are not functioning as intended, immediately take corrective action.

201 - Clearing and Grubbing

201.00_nat_us_08_05_2009

201.2 Material:

Delete Tree wound dressing material reference.

201.3 General.

Delete the last sentence.

201.4 Clearing.

Delete the last sentence of (d).

201.01_nat_us_02_18_2005

201.01 Description

Replace with the following

This work consists of clearing and grubbing within clearing limits and other designated areas.

201.04_nat_us_02_22_2005

201.04 Clearing. (c)

Delete paragraph (c) and replace with the following:

(c) In areas outside the excavation, embankment, and slope rounding limits, cut stumps to within 12 inches or one-third of the stump diameter of the ground, whichever is higher, measured on the side adjacent to the highest ground. For timber sales, stump heights will meet the requirements of the Timber Sale contract.

201.04 Clearing.

Delete subsection (d) and replace with the following:

(d) Do not cut vegetation less than 3 feet tall and less than 3 inches in diameter, that is within the clearing limits but beyond the roadway and not in a decking area, and that does not interfere with sight distance along the road.

Add the following:

(e) Trim branches of remaining trees or shrubs to give a clear height of 14 feet above the roadbed unless otherwise indicated. Trim tree limbs as near flush with the trunk as practicable.

(f) Remove brush from log decks. Deck logs so that logs are piled parallel to one another; can be removed by standard log loading equipment; will not damage standing trees; will not interfere with drainage, and will not roll. Keep logs in log decks free of brush and soil.

201.06_nat_us_02_18_2005

201.06 Disposal.

Delete the first sentence of this subsection and substitute the following:

Dispose of merchantable timber designated for removal according to the provisions of the timber sale contract.

203 - Removal of Structures and Obstructions

203.00_01_us_10_11_2006

203.03 Salvaging Material.

Delete this subsection and add the following:

Unless shown on the plans, remove all designated material from the project area and National Forest land.

203.05 Disposing of Material.

(a) Remove from project.

Delete this paragraph and add the following:

All removed material may be salvaged by the Contractor unless otherwise shown on the plans. Dispose of all items not designated to be salvaged for the Government in any legal manner.

203.01_nat_us_02_25_2005

203.01 Description.

Delete and replace with the following:

This work consists of disposing of construction slash and debris, salvaging, removing, and disposing of buildings, fences, structures, pavements, culverts, utilities, curbs, sidewalks, and other obstructions.

203.03_0114_us_08_04_2005

203.3 Salvaging Material

Delete paragraphs two and three and add:

Stockpile salvaged material at a location approved by the CO.

203.04_nat_us_02_18_2005

203.4 Removing Material.

Replace the fourth and fifth paragraphs with the following:

Where part of an existing culvert is removed, remove the entire culvert upstream from the removal. The remaining downstream culvert may be left in place if no portion of the culvert is within 12 inches of the subgrade, embankment slope, or new culvert or structure; and the culvert ends are sealed with concrete.

Remove structures and obstructions in the roadbed to 12 inches below subgrade elevation.

Remove structures and obstructions outside the roadbed to 12 inches below finished ground or to the natural stream bottom.

203.05_nat_us_02_18_2005

203.5 Disposing of Material.

(b) Burn.

Delete the last sentence and add the following:

Deposit construction slash so that burning does not damage standing trees. Dispose of unburned material as directed by the CO.

203.05_nat_us_02_18_2005

203.05 Disposing of Material.

Add the following:

(e) Windrowing Construction Slash. Place construction slash outside the roadway in neat, compacted windrows approximately parallel to and along the toeline of embankment slopes. Do not permit the top of the windrows to extend above subgrade. Use construction equipment to matt down all material in a windrow to form a compact and uniform pile. Construct breaks of at least 15 feet at least every 200 feet in a windrow. Do not place windrows against trees. Obtain approval for pioneer roads. A pioneer road may be constructed to provide an area for placement of windrows, provided the excavated material is kept within the clearing limits and does not adversely affect the road construction.

(f) Scattering. Scatter construction slash outside the clearing limits without damaging trees. Limb all logs. Place logs and stumps away from trees, positioned so they will not roll, and are not on top of one another. Limb and scatter other construction slash to reduce slash concentrations.

(g) Chipping or Grinding. Use an approved chipping machine to grind slash and stumps greater than 3 inches in diameter and longer than 3 feet. Deposit chips or ground woody material on embankment slopes or outside the roadway to a loose depth less than 6 inches. Minor amounts of chips or ground woody material may be permitted within the roadway if they are thoroughly mixed with soil and do not form a layer.

(h) Debris Mat. Use tree limbs, tops, cull logs, split stumps, wood chunks, and other debris to form a mat upon which construction equipment is operated. Place stumps upside down and blend stumps into the mat.

(i) Decking Firewood Material. Remove brush from decks. Limb and deck logs that do not meet Utilization Standards according to Subsection 201.04 as directed by the CO. Cut logs to lengths less than 30 feet. Ensure that logs stacks are stable and free of brush and soil.

(j) Removal to designated locations. Remove construction slash to designated locations.

(k) Piling. Pile construction slash in designated areas. Place and construct piles so that if the piles are burned, the burning will not damage remaining trees. Keep piles free of dirt from stumps. Cut unmerchantable logs into lengths of less than 20 feet.

(l) Placing Slash on Embankment Slopes. Place construction slash on completed embankment slopes to reduce soil erosion. Place construction slash as flat as practicable on the completed slope. Do not place slash closer than 2 feet below subgrade. Priority for use of available slash is for: (1) through fills; (2) insides of curves; and (3) ditch relief outlets.

(m) Hydrological Sensitive Placement. Where required use this method in combination with other designated methods to dispose of material to reduce erosion and to aid in re-vegetation:

1. Place windrow segments on contours, wrap in type I geotextile.
2. Place logs as log erosion barriers on contours. Place logs so that 80% of their length is on the ground surface.
3. Scatter slash on bare or disturbed areas within or outside the clearing limits as directed.
4. Scatter chips or ground woody material on bare or disturbed areas within or outside the clearing limits as directed.

Place stumps in swales or on sites to form planting pockets. Place windrow segments on contours, wrap in type I geotextile.

203.05_0114_us_02_15_2005

203.5 Disposing of Material.

(a) Remove from project.

Delete the last two sentences

203.08_nat_us_02_24_2005

203.08 Payment

Add the following:

Disposal of construction slash will be compensated under the designated pay item in Section 201.

204 - Excavation and Embankment

204.00_01_us_10_11_2006

Delete Section 204 in its entirety and replace with the following.

Description

204.1 This work consists of excavating material, constructing embankments and drainage excavation. This includes furnishing, hauling, stockpiling, placing, disposing, sloping, shaping, compacting, and finishing earthen and rocky material.

204.2 Definitions.

(a) **Excavation.** Excavation consists of the following:

(1) **Roadway excavation.** All material excavated from within the right-of-way or easement areas, except subexcavation covered in (2) below and structure excavation covered in Sections 208 and 209. Roadway excavation includes all material encountered regardless of its nature or characteristics.

(2) **Subexcavation.** Material excavated from below subgrade elevation in cut sections or from below the original groundline in embankment sections. Subexcavation does not include the work required by Subsections 204.05, 204.06(b), and 204.06(c).

(3) **Borrow excavation.** Material used for embankment construction that is obtained from outside the roadway prism. Borrow excavation includes unclassified borrow, select borrow, and select topping.

(b) **Embankment construction.** Embankment construction consists of placing and compacting roadway or borrow excavation. This work includes:

- (1) Preparing foundation for embankment;
- (2) Constructing roadway embankments;
- (3) Benching for side-hill embankments;
- (4) Constructing dikes, ramps, mounds, and berms; and
- (5) Backfilling subexcavated areas, holes, pits, and other depressions.

(c) **Conserved topsoil.** Excavated material conserved from the roadway excavation and embankment foundation areas that is suitable for growth of grass, cover crops, or native vegetation.

(d) **Waste.** Excess and unsuitable roadway excavation and subexcavation that cannot be used.

Material

204.3 Conform to the following Subsections:

Backfill material	704.03
Select borrow	704.07
Select topping	704.08
Topping	704.05
Unclassified borrow	704.06
Water	725.01

Construction Requirements

204.4 Preparation for Roadway Excavation and Embankment Construction. Clear the area of vegetation and obstructions according to Sections 201 and 203.

204.5 Reserved.

204.6 Roadway Excavation. Excavate as follows:

(a) General. Do not disturb material and vegetation outside the construction limits.

Incorporate only suitable material into embankments. Replace any shortage of suitable material caused by premature disposal of roadway excavation

At the end of each day's operations, shape to drain and compact the work area to a uniform cross-section. Eliminate all ruts and low spots that could hold water.

Retrieve material deposited outside of the clearing limits as directed by the CO.

(b) Rock cuts. Blast rock according to Section 205. Excavate rock cuts to 6 inches below subgrade within the roadbed limits. Backfill to subgrade with topping or with other suitable material. Compact the material according to Subsection 204.11 When blasting rock, use blasting methods according to Subsection 205.08.

(c) Earth cuts. Scarify earth cuts to 6 inches below subgrade within the roadbed limits. Compact the scarified material according to Subsection 204.11.

(d) Pioneer Roads. Road pioneering, slash disposal, and grubbing of stumps may proceed concurrently with excavation. Conduct excavation and placement operations so material to be treated under Section 201 will not be incorporated into the roadway unless specified in the slash treatment method. Maintain drainage during pioneering operations.

Remove snow and ice in advance of the work and deposit beyond the roadway limits in a manner that will not waste material or generate sediment. Do not incorporate snow and ice into embankments. Place snow or ice in a manner to prevent resource damage.

(e) Drainage Excavation. Drainage excavation includes construction of all ditches, minor channel changes, drainage dips, catchbasins, surface water deflectors, and other minor drainage structures. Compact by Method (f) unless otherwise shown on the plans. Excavate on a uniform grade between control points.

204.7 Subexcavation. Excavate material to the limits as designated. Take cross-sections according to Section 152. Prevent unsuitable material from becoming mixed with the backfill. Dispose of unsuitable material according to Subsection 204.14. Backfill the subexcavation with topping, or other suitable material. Compact the material according to Subsection 204.11.

204.8 Borrow Excavation. Use all suitable roadway excavation in embankment construction. Do not use borrow excavation when it results in excess roadway excavation. Deduct excess borrow excavation from the appropriate borrow excavation quantity.

Obtain borrow source acceptance according to Subsection 105.02. Develop and restore borrow sources according to Subsection 105.03. Do not excavate beyond the established limits. When applicable, shape the borrow source to permit accurate measurements when excavation is complete.

204.9 Preparing Foundation for Embankment Construction. Prepare foundation for embankment construction as follows:

(a) **Embankment less than 4 feet high over natural ground.** Unless otherwise designated by the CO, remove topsoil. Break up the ground surface to a minimum depth of 6 inches by plowing or scarifying. Compact the ground surface according to Subsection 204.11.

(b) **Embankments over an existing asphalt, concrete, or gravel road surface.** Scarify gravel roads to a minimum depth of 6 inches. Scarify or pulverize asphalt and concrete roads to 6 inches below the pavement. Reduce all particles to a maximum size of 6 inches and produce a uniform material. Compact the surface according to Subsection 204.11.

(c) **Embankment across ground not capable of supporting equipment.** Dump successive loads of embankment material in a uniformly distributed layer to construct the lower portion of the embankment. Limit the layer thickness to the minimum depth necessary to support the equipment.

(d) **Embankment on an existing slope steeper than 1V:3H.** Cut horizontal benches in the existing slope to a sufficient width to accommodate placement and compaction operations and equipment. Bench the slope as the embankment is placed and compacted in layers. Begin each bench at the intersection of the original ground and the vertical cut of the previous bench.

204.10 Embankment Construction. Incorporate only suitable roadway excavation material into the embankment. When the supply of suitable roadway excavation is exhausted, furnish unclassified borrow to complete the embankment. Obtain written approval before beginning construction of embankments over 6 feet high at subgrade centerline. Construct embankments as follows:

(a) **General.** At the end of each day's operations, shape to drain and compact the embankment surface to a uniform cross-section. Eliminate all ruts and low spots that could hold water.

During all stages of construction, route and distribute hauling and leveling equipment over the width and length of each layer of material.

Compact embankment side slopes flatter than 1V:1.75H with a tamping type roller or by walking with a dozer. For slopes 1V:1.75H or steeper, compact the slopes as construction of the embankment progresses.

Where placing embankment on one side of abutments, wing walls, piers, or culvert headwalls, compact the material using methods that prevent excessive pressure against the structure.

Where placing embankment material on both sides of a concrete wall or box structure, conduct operations so compacted embankment material is at the same elevation on both sides of the structure.

Where structural pilings are placed in embankment locations, limit the maximum particle size to 4 inches.

(b) Embankment within the roadway prism. Place embankment material in horizontal layers not exceeding 12 inches in compacted thickness. Incorporate oversize boulders or rock fragments into the 12-inch layers by reducing them in size or placing them individually as required by (c) below. Compact each layer according to Subsection 204.11 before placing the next layer.

Material composed predominately of boulders or rock fragments too large for 12-inch layers may be placed in layers up to 24 inches thick. Incorporate oversize boulders or rock fragments into the 24-inch layer by reducing them in size or placing them individually according to (c) below. Place sufficient earth and smaller rocks to fill the voids. Compact each layer according to Subsection 204.11 before placing the next layer.

(c) Individual rock fragments and boulders. Place individual rock fragments and boulders greater than 24 inches in diameter as follows:

- (1) Reduce rock to less than 48 inches in the largest dimension.
- (2) Distribute rock within the embankment to prevent nesting.
- (3) Place layers of embankment material around each rock to a depth not greater than that permitted by (b) above. Fill all the voids between rocks.
- (4) Compact each layer according to Subsection 204.11 before placing the next layer.

(d) Embankment outside of roadway prism. Where placing embankment outside the staked roadway prism, place material in horizontal layers not exceeding 24 inches in compacted thickness. Compact each layer according to Subsection 204.11.

204.11 Compaction. Compact the embankment using one of the following methods as specified:

(a) Compaction A. Use AASHTO T 27 to determine the amount of material retained on a Number 4 sieve. If there is more than 80 percent retained on the No. 4 sieve use procedure (1). If there is 50 to 80 percent retained on the No. 4 sieve use procedure (2). If there is less than 50 percent retained on the No. 4 sieve use procedure (3).

- (1) Adjust the moisture content to a level suitable for compaction. Fill the interstices around rock with earth or other fine material as practical. Use compression-type rollers at speeds less than 6 feet per second and vibratory rollers at speeds less than 3 feet per second. Compact each layer of material full width with one of the following and until there is no visible evidence of further consolidation.

(a) Four roller passes of a vibratory roller having a minimum dynamic force of 40,000 pounds impact per vibration and a minimum frequency of 1000 vibrations per minute.

(b) Eight roller passes of a 20-ton compression-type roller.

(c) Eight roller passes of a vibratory roller having a minimum dynamic force of 30,000 pounds impact per vibration and a minimum frequency of 1000 vibrations per minute.

Increase the compactive effort for layers deeper than 12 inches as follows:

- For each additional 6 inches or fraction thereof, increase the number of roller passes in (a) above by four passes.
- For each additional 6 inches or fraction thereof, increase the number of roller passes in (b) and (c) above, by eight passes.

(2) Use AASHTO T 99 to determine the optimum moisture content of the portion of the material passing a No. 4 sieve. Multiply this number by the percentage of material passing a No. 4 sieve, and add 2 percent to determine the optimum moisture content of the material. Adjust the moisture content of material classified A-1 through A-5 to a moisture content suitable for compaction. Adjust the moisture content of material classified A-6 and A-7 to within 2 percent of the optimum moisture content.

Use compression-type rollers at speeds less than 6 feet per second and vibratory rollers at speeds less than 3 feet per second. Compact each layer of material full width according to (1) above.

(3) Classify the material according to AASHTO M 145. For material classified A-1 or A-2-4, determine the maximum density according to AASHTO T 180, method D. For other material classifications, determine the optimum moisture content and maximum density according to AASHTO T 99, method C.

Adjust the moisture content of material classified A-1 through A-5 to a moisture content suitable for compaction. Adjust the moisture content of material classified A-6 and A-7 to within 2 percent of the optimum moisture content.

Use compression-type or vibratory rollers. Compact each layer of material full width to at least 95 percent of the maximum density. Determine the in-place density and moisture content according to AASHTO T 310 or other approved test procedures. When required, use AASHTO T 224 to correct for coarse particles.

(b) **Compaction B.** Place material by end dumping to the minimum depth needed for operation of spreading equipment. Adjust the moisture content of the material to obtain a mass that will not visibly deflect under the load of the hauling and spreading equipment. Operate compaction equipment over the full width of each layer until there is no visible evidence of further consolidation or, if when a sheepsfoot roller is used, the roller “walks out” of the layer. Make at least three complete passes.

(c) **Compaction C.** Place material by end dumping to the minimum depth needed for operation of spreading equipment. Level and smooth each embankment layer before placing the next layers. Operate hauling and spreading equipment uniformly over the full width of

each layer. Construct a solid embankment with adequate compaction by working smaller rock and fines in with the larger rocks to fill the voids, and by operating hauling and spreading equipment uniformly over the full width of each layer as the embankment is constructed.

(d) Compaction D. Hauling and Spreading Equipment. Adjust the moisture content to a level suitable for compaction. Compact the material by operating equipment over the full width of the roadway.

(e) Compaction E. Roller Compaction. Adjust the moisture content to a level suitable for compaction. Operate Rollers over the full width of each layer until visual displacement ceases, but not fewer than three complete passes. Use rollers that meet the following requirements:

(1) Steel wheeled rollers, other than vibratory, capable of exerting a force of not less than 250 pounds per inch of width of the compression roll or rolls.

(2) Vibratory steel wheeled rollers equipped with amplitude and frequency controls with a minimum weight of 6 tons, specifically designed to compact the material on which it is used.

(3) Pneumatic-tired rollers with smooth tread tires of equal size that will provide a uniform compacting pressure for the full width of the roller and capable of exerting a ground pressure of at least 80 psi.

(4) Sheepfoot, tamping, or grid rollers capable of exerting a force of 250 lbs/inch of width of roller drum.

(f) Compaction F. Mechanical Tamper. Adjust the moisture content of the backfill material to a moisture content suitable for compaction. Compact each 6 inch layer with a minimum of three complete passes with a mechanical tamper.

204.12 Ditches. Slope, grade, and shape ditches. Remove all projecting roots, stumps, rock, or similar matter. Maintain all ditches in an open condition and free from leaves, sticks, and other debris.

Form furrow ditches by plowing or using other acceptable methods to produce a continuous furrow. Place all excavated material on the downhill side so the bottom of the ditch is approximately 18 inches below the crest of the loose material. Clean the ditch using a hand shovel, ditcher, or other suitable method. Shape to provide drainage without overflow.

204.13 Sloping, Shaping, and Finishing. Complete slopes, ditches, culverts, riprap, and other underground minor structures before placing aggregate courses. Slope, shape, and finish as follows:

(a) Sloping. Leave all earth slopes with uniform roughened surfaces, except as described in (b) below, with no noticeable break as viewed from the road. Except in solid rock, round tops and bottoms of all slopes including the slopes of drainage ditches. Round material overlaying solid rock to the extent practical. Scale all rock slopes. Slope rounding is not required on tolerance class D through M roads.

If a slide or slipout occurs on a cut or embankment slope, remove or replace the material, and repair or restore all damage to the work. Bench or key the slope to stabilize the slide. Reshape the cut or embankment slope to an acceptable condition.

(b) Stepped slopes. Where required by the contract, construct steps on slopes of 1½V:1H to 1V:2H. Construct the steps approximately 18 inches high. Blend the steps into natural ground at the end of the cut. If the slope contains nonrippable rock outcrops, blend steps into the rock. Remove loose material found in transitional area. Except for removing large rocks that may fall, scaling stepped slopes is not required.

(c) Shaping. Shape the subgrade to a smooth surface and to the cross-section required. Shape slopes to gradually transition into slope adjustments without noticeable breaks. At the ends of cuts and at intersections of cuts and embankments, adjust slopes in the horizontal and vertical planes to blend into each other or into the natural ground.

(d) Finishing. Finish the roadbed to be smooth and uniform, and shaped to conform to the typical sections. Remove unsuitable material from the roadbed and replace it with suitable material. Finish roadbeds to the tolerance class shown in table 204-2. Ensure that the subgrade is visibly moist during shaping and dressing. Scarify to 6 inches below the bottom of low sections, holes, cracks, or depressions and bring back to grade with suitable material. Maintain proper ditch drainage.

For surfaced roads, remove all material larger than 6 inches from the top 6 inches of the roadbed.

For unsurfaced roads, use one of the following methods to finish the roadbed:

(1) **Method A.** Remove all material larger than 6 inches from the top 6 inches of the roadbed and replace with suitable material.

(2) **Method B.** Use a vibratory grid roller or approved equal with a minimum weight of 10 tons. Roll at least 5 full-width passes or until there is no visible evidence of further consolidation.

(3) **Method C.** For roads designated as Construction Tolerance Class K, L, or M, finish the roadbed by spreading the excavation. Eliminate rock berms.

204.14 Disposal of Unsuitable or Excess Material. Dispose of unsuitable or excess material at designated sites or legally off of the project.

When there is a pay item for waste, shape and compact the waste material in its final location. Do not mix clearing or other material not subject to payment with the waste material.

204.15 Acceptance. See Table 204-1 for sampling and testing requirements.

Material for embankment and conserved topsoil will be evaluated under Subsections 106.02 and 106.04.

Excavation and embankment construction will be evaluated under Subsections 106.02 and 106.04.

Clearing and removal of obstructions will be evaluated under Sections 201 and 203.

204.16 Measure the Section 204 items listed in the bid schedule according to Subsection 109.02 and the following as applicable.

(a) Roadway excavation. Measure roadway excavation in its original position as follows:

(1) Include the following volumes in roadway excavation:

- (a) Roadway prism excavation;
- (b) Rock material excavated and removed from below subgrade in cut sections;
- (c) Unsuitable material below subgrade and unsuitable material beneath embankment areas when a pay item for subexcavation is not shown in the bid schedule;
- (d) Ditches, except furrow ditches measured under a separate bid item;
- (e) Topsoil;
- (f) Borrow material used in the work when a pay item for borrow is not shown in the bid schedule;
- (g) Loose scattered rocks removed and placed as required within the roadway;
- (h) Conserved material taken from stockpiles and used in Section 204 work; and
- (i) Slide and slipout material not attributable to the Contractor's method of operation.

(2) Do not include the following in roadway excavation:

- (a) Overburden and other spoil material from borrow sources;
- (b) Overbreakage from the backslope in rock excavation;
- (c) Water or other liquid material;
- (d) Material used for purposes other than required;
- (e) Roadbed material scarified in place and not removed;
- (f) Material excavated when stepping cut slopes;
- (g) Material excavated when rounding cut slopes;
- (h) Preparing foundations for embankment construction;
- (i) Material excavated when benching for embankments;
- (j) Slide or slipout material attributable to the Contractor's method of operation;
- (k) Conserved material taken from stockpiles constructed at the option of the Contractor; and
- (l) Material excavated outside the established slope limits.

(3) When both roadway excavation and embankment construction pay items are shown in the bid schedule, measure the following as roadway excavation only:

- (a) Unsuitable material below subgrade in cuts and unsuitable material beneath embankment areas when a pay item for subexcavation is not shown in the bid schedule;

(b) Slide and slipout material not attributable to the Contractor's method of operations; and

(c) Drainage ditches, channel changes, and diversion ditches.

(b) Unclassified borrow, select borrow, and select topping. When measuring by the cubic yard measure in its original position. If borrow excavation is measured by the cubic yard in place, take initial cross-sections of the ground surface after stripping overburden. Upon completion of excavation and after the borrow source waste material is returned to the source, retake cross-sections before replacing the overburden.

Do not measure borrow excavation used in place of excess roadway excavation.

(c) Embankment construction. Measure embankment construction in its final position. Do not make deductions from the embankment construction quantity for the volume of minor structures.

(1) Include the following volumes in embankment construction:

(a) Roadway embankments;

(b) Material used to backfill subexcavated areas, holes, pits, and other depressions;

(c) Material used to restore obliterated roadbeds to original contours; and

(d) Material used for dikes, ramps, mounds, and berms.

(2) Do not include the following in embankment construction:

(a) Preparing foundations for embankment construction;

(b) Adjustments for subsidence or settlement of the embankment or of the foundation on which the embankment is placed; and

(c) Material used to round fill slopes.

(d) Rounding cut slopes. Measure rounding cut slopes horizontally along the centerline of the roadway if a pay item for slope rounding is included in the bid schedule. If a pay item for slope rounding is not included in the bid schedule slope rounding will be considered subsidiary to excavation.

(e)) Waste. Measure waste by the cubic yard in its final position. Take initial cross-sections of the ground surface after stripping over burden. Upon completion of the waste placement, retake cross-sections before replacing overburden.

(f) Slope scaling. Measure slope scaling by the cubic yard in the hauling vehicle.

Payment

204.17 The accepted quantities will be paid at the contract price per unit of measurement for the Section 204 pay items listed in the bid schedule. Payment will be full compensation for the work prescribed in this Section. See Subsection 109.05

Table 204-1
Sampling and Testing Requirements

Material or Product	Type of Acceptance (Subsection)	Characteristic	Category	Test Methods Specifications	Sampling Frequency	Point of Sampling	Split Sample	Reporting Time
Topping (704.05) & unclassified borrow (704.06)	Measured and tested for conformance (106.04)	Classification	—	AASHTO M 145	1 per soil type	Processed material before incorporating in work	Yes, when requested	Before using in work
		Moisture- density	—	AASHTO T 180, method D ⁽¹⁾ or T 99, method C ⁽¹⁾	1 per soil type but not less than 1 per	“	“	“
		Compaction	—	AASHTO T 310 or other approved procedures	1 per 6000 yd ² but not less than 1 per layer	In-place	—	Before placing next layer
Select borrow (704.07 & Select topping (704.08)	Measured and tested for conformance (106.04)	Classification	—	AASHTO M 145	1 per soil type but not less than 1 for each day of production	Processed material before incorporating	Yes, when requested	Before using in work
		Gradation	—	AASHTO T 27	“	“	“	“
		Liquid limit	—	AASHTO T 89	“	“	“	“
		Moisture- density	—	AASHTO T 180, method D ⁽¹⁾ or T 99, method C ⁽¹⁾	1 per soil type but not less than 1 per	“	“	“
		Compaction	—	AASHTO T 310 or other approved procedures	1 per 6000 yd ² but not less than 1 per layer	In-place	—	Before placing next layer

(1) Minimum of 5 points per proctor

Table 204-1 (continued)
Sampling and Testing Requirements

Material or Product	Type of Acceptance (Subsection)	Characteristic	Category	Test Methods Specifications	Sampling Frequency	Point of Sampling	Split Sample	Reporting Time
Earth embankment (204.11, Compaction A)	Measured and tested for conformance (106.04)	Classification	—	AASHTO M 145	1 per soil type	Source of Material	Yes, when requested	Before using in work
		Moisture-density	—	AASHTO T 180, method D ⁽¹⁾ or T 99, method C ⁽¹⁾	1 per soil type but not less than 1 per 13,000 yd ³	“	“	“
		Compaction	—	AASHTO T 310 or other approved procedures	1 per 3500 yd ² but not less than 1 per layer	In-place	—	Before placing next layer
Top of subgrade (204.11 Compaction A)	Measured and tested for conformance (106.04)	Compaction	—	AASHTO T 310 or other approved procedures	1 per 2500 yd ²	In-place	—	Before placing next layer

(1) Minimum of 5 points per proctor.

**Table 204-2
Construction Tolerances**

	Tolerance Class ^(a)												
	A	B	C	D	E	F	G	H	I	J	K	L	M
Roadbed width (ft)	+0.5	+0.5	+1.0	+1.0	+1.0	+1.0	+1.5	+1.0	+2.0	+2.0	+2.0	+2.0	+2.0
Subgrade elevation (ft)	±0.1	±0.2	±0.2	±0.5	±0.5	±1.0	±1.0	±1.5	±2.0	±3.0	±2.0	±3.0	(c)
Centerline alignment (ft)	±0.2	±0.2	±0.5	±0.5	±1.0	±1.0	±1.5	±1.5	±2.0	±3.0	±3.0	±5.0	(c)
Slopes, excavation, and embankment (% slope ^(b))	±3	±5	±5	±5	±5	±5	±10	±10	±10	±10	±20	±20	±20

(a) Maximum allowable deviation from construction stakes and drawings.

(b) Maximum allowable deviation from staked slope measured from slope stakes or hinge points.

(c) Unless otherwise shown the centerline alignment and subgrade elevation, as built, have no horizontal curves with a radius of less than 80 feet, and no vertical curves with a curve length of less than 80 feet when the algebraic difference in the grade change is less than 10 percent, or a curve length of less than 100 feet when the algebraic difference of

204.06 Roadway Excavation

Add the following:

- (d) **Drainage Excavation.** Drainage excavation includes construction of side ditches, minor channel changes, inlet and outlet ditches, furrow ditches, rolling drainage dips, surface water deflectors and other minor earth drainage structures as shown on the plans. Compaction for drainage excavation is as shown on the plans.

204.11 Compaction

Delete the first paragraph and replace it with the following:

For compaction according to method (a), (b), or (c), use AASHTO T 27 to determine the amount of material retained on a Number. 4 sieve. For compaction methods (d), (e), or (f) no sieve test is required.

Add the following compaction methods:

(d) **Hauling and Spreading Equipment.** Adjust the moisture content to a level suitable for compaction. Compact the material by operating equipment over the full width of the roadway.

(e) **Roller Compaction.** Adjust the moisture content to a level suitable for compaction. Operate Rollers over the full width of each layer until visual displacement ceases, but not fewer than three complete passes. Use rollers that meet the following requirements:

- (1) Steel wheeled rollers, other than vibratory, capable of exerting a force of not less than 250 pounds per inch of width of the compression roll or rolls.

(2) Vibratory steel wheeled rollers equipped with amplitude and frequency controls with a minimum weight of 6 tons, specifically designed to compact the material on which it is used.

(3) Pneumatic-tired rollers with smooth tread tires of equal size that will provide a uniform compacting pressure for the full width of the roller and capable of exerting a ground pressure of at least 80 psi.

(4) Sheepsfoot, tamping, or grid rollers capable of exerting a force of 250 lbs/inch of width of roller drum.

(f) Mechanical Tamper. Adjust the moisture content of the backfill material to a moisture content suitable for compaction. Compact each 6 inch layer with a minimum of three complete passes with a mechanical tamper, approved by the CO.

204.14 Disposal of Unsuitable or Excess Material.

Delete the text of the first paragraph and substitute the following:

Dispose of unsuitable or excess material at designated sites or legally off the project.

204.15 Acceptance

Delete the first paragraph.

204.13 Sloping, Shaping, and Finishing.

Delete section (d) and add the following:

(d) Finishing. For surfaced roads, remove all material larger than 6 inches from the top 6 inches of the roadbed. For all roads, finish the roadbed to be smooth and uniform, and shaped to conform to the typical sections. Remove unsuitable material from the roadbed and replace it with suitable material. Finish roadbeds to the tolerance class shown in table 204-2.

Ensure that the subgrade for both surfaced and unsurfaced roads is visibly moist during shaping and dressing. Scarify to 6 inches below the bottom of low sections, holes, cracks, or depressions and bring back to grade with suitable material. Maintain proper ditch drainage.

For unsurfaced roads, use one of the following methods to finish the roadbed:

- (1) Method A. Remove all material larger than 6 inches from the top 6 inches of the roadbed and replace with suitable material.
- (2) Method B. Use a vibratory grid roller or approved equal with a minimum weight of 10 tons. Roll at least 5 full-width passes or until visible displacement ceases.
- (3) Method C. For roads designated as Construction Tolerance Class K, L, or M, finish the roadbed by spreading the excavation. Eliminate rock berms.

Add Table 204-2—Construction Tolerances:

Table 204-2 Construction tolerances.

	Tolerance Class ^(a)												
	A	B	C	D	E	F	G	H	I	J	K	L	M
Roadbed width (ft)	+0.5	+0.5	+1.0	+1.0	+1.0	+1.0	+1.5	+1.0	+2.0	+2.0	+2.0	+2.0	+2.0
Subgrade elevation (ft)	±0.1	±0.2	±0.2	±0.5	+0.5	±1.0	±1.0	±1.5	±2.0	±3.0	±2.0	±3.0	(c)
Centerline alignment (ft)	±0.2	±0.2	±0.5	±0.5	±1.0	±1.0	±1.5	±1.5	±2.0	±3.0	±3.0	±5.0	(c)
Slopes, excavation, and embankment (% slope ^(b))	±3	±5	±5	±5	±5	±5	±10	±10	±10	±10	±20	±20	±20

a. Maximum allowable deviation from construction stakes and drawings.

b. Maximum allowable deviation from staked slope measured from slope stakes or hinge points.

c. Unless otherwise shown the centerline alignment and subgrade elevation, as built, have no horizontal curves with a radius of less than 80 feet, and no vertical curves with a curve length of less than 80 feet when the algebraic difference in the grade change is less than 10 percent, or a curve length of less than 100 feet when the algebraic difference of the grade change is greater than or equal to 10 percent. The centerline grade is not to exceed 20 percent in 100 feet of length.

204.14 Disposal of Unsuitable or Excess Material.

Delete the text of the first paragraph and substitute the following:

Dispose of unsuitable or excess material at designated sites or legally off of the project.

204.15_nat_us_02_07_2007

204.15 Acceptance

Table 204-1 Sampling and Testing Requirements.

Add the following note to the table:

(2) When compaction methods (d) or (e) are used AASHTO M 145, T 99, T 180, and T 310 are not required for earth embankment test methods.

204.16_0114_us_02_25_2005

204.16 Measurement.

b) Unclassified borrow, select borrow, and select topping

Delete first paragraph and add the following:

Measure by the cubic yard in place.

208 - Structure Excavation and Backfill for Selected Major Structures

208.04_nat_us_08_05_2009

Construction Requirements

208.04 General.

Add the following to the end of the second sentence of the third paragraph:

"... to the CO a minimum of 5 days prior to beginning excavation work."

Add the following to the end of the third sentence of the third paragraph:

"...to the CO a minimum of 15 days prior to installation."

208.09 Foundation Preparation.

Add the following after the first paragraph:

The foundation elevation is defined as the bottom of footings, for spread footing placement; the bottom of the pile cap, for construction of pile foundations; and the toe of the wall, for construction of retaining walls, except wingwalls at bridges.

Replace all material from any over-excavation below the designated footing elevation with concrete, compacted gravel, or foundation fill at the direction of the CO.

When boulders or irregular, fractured, or seamed bedrock precludes excavation to the designated footing elevation without further loosening of previously solid material, the CO may order removal of such loose material and allow payment for concrete, gravel, or structural backfill that is required to restore foundation material to the designated elevation

208.13 Measurement.

Add the following to the second paragraph:

(f) Material excavated to construct end walls or wing walls which lie outside the excavation limits specified above.

Add the following paragraph:

Foundation over-excavation and the resulting replacement material will not be measured for payment unless the CO determines the over-excavation was unavoidable because of the nature of the material.

209 - Structure Excavation and Backfill

209.00_01_us_10_11_2006

209.07 Dewatering

Delete the subsection and add the following:

Submit a Dewatering Plan 5 days prior to beginning excavation.

Construct diversion prior to performing any excavation. Construct diversions using water tight, non-eroding methods. Employ settling basins or other methods so that muddy water is not returned to stream. Install, operate, and remove diversions in a manner that minimizes erosion and sedimentation.

209.10 Backfill.

(a) General.

Add the following:

Replace any pipe that is distorted by more than 5 percent of nominal dimensions, or that is ruptured or broken.

Do not place or backfill pipe that meets any of the following conditions until the excavation and foundation have been approved in writing by the CO:

- Embankment height greater than 6 feet at subgrade centerline.
- Installation in a protected streamcourse.
- Round pipe with a diameter of 48 inches or greater.
- Pipe arches with a span of 50 inches or greater.
- Any box culvert of structure other than pipe culverts.

(b) Pipe Culverts.

(1) Pipe culverts with compacted backfill.

GTR Dunn Timber Sale

Add the following:

On each side of the pipe, excavate an area at least as wide as the diameter of the pipe. Backfill without damaging or displacing the pipe. Complete backfilling of the trench with suitable material.

209.11 Compacting.

Delete the subsection and add the following:

Compact backfill using designated compaction method A, B, C, or D:

Method A. Ensure that backfill density exceeds the density of the surrounding embankment.

Method B. Adjust the moisture content of the backfill material to a moisture content suitable for compaction. Compact each layer 6 inch layer with a minimum of three complete passes or until visual displacement ceases using a mechanical tamper, (wacker-packer type or approved equal). For compaction under sections 252, 254, 255, 257, 258 and 262 compact with a vibratory steel wheeled roller with a mass of at least 8 tons.

Method C. Compact each layer of backfill with a minimum of two passes with mechanical tamper, (wacker-packer type, or approved equal).

Method D. Determine optimum moisture content and maximum density according to AASHTO T 99 method C. Adjust the moisture content of the backfill material to a moisture content suitable for compaction. Compact material placed in all layers to at least 95 percent of the maximum density. Determine the in place density and moisture content according to AASHTO T 310 or other approved test procedures.

209.12 Acceptance.

Sampling and Testing Requirements

Add the following:

Compaction methods (A),(B), and (C) do not require AASHTO T-99 or T-310 test methods for foundation fill.

209.13 See Subsection 109.05

Delete the first sentence and replace with the following:

Do not measure structure excavation, bedding, and backfill for payment.

209.11_0114_us_02_15_2005

209.11 Compacting.

Delete the subsection and add the following:

Compact backfill using designated compaction method A, B, or C:

Method A. Ensure that backfill density exceeds the density of the surrounding embankment.

Method B. Adjust the moisture content of the backfill material to a moisture content suitable for compaction. Compact each 6 inch layer with a minimum of three complete passes with a mechanical tamper, approved by the CO. For compaction under sections 252, 254, 255, 257, 258 and 262 compact with a vibratory steel wheeled roller with a mass of at least 8 tons.

Method C. Determine optimum moisture content and maximum density according to AASHTO T 99 method C. Adjust the moisture content of the backfill material to a moisture content suitable for compaction. Compact material placed in all layers to at least 95 percent of the maximum density. Determine the in place density and moisture content according to AASHTO T 310 or other approved test procedures.

209.12 Acceptance

Add the following:

Compaction methods (A) and (B) do not require sampling and testing.

230 - Roadside Brushing

230.00_0114_us_08_04_2005

Description

230.1 Work. This work consists of removing all vegetative material including limbs, residual slash, live roadside brush, and small trees within the brushing limits designated on the plans.

Construction

230.2 Brushing. Cut all brush and small trees (6 inches diameter, or less, at the point of cut) inside the brushing limits and outside the roadbed no higher than 4 inches above ground level (6 inches for machine brushing). If rocks or other obstructions are encountered, cut no higher than 6 inches above the obstruction. Limb live trees with a diameter larger than 6 inches to provide a clear height of 14 feet above the road surface.

Cut all brush and trees located on the roadbed as nearly flush to the road surface as possible so stumps will not become a hazard to vehicle tires.

230.3 Windfalls. Limb windfalls lying within or across the brushing limits, cut off at the top of the existing cut slope or 5 feet from the shoulder on the fill slope. Dispose of windfall material as slash.

230.4 Road Junctions. Do not deposit brushing debris on the roadway of adjoining roads.

230.5 Slash Treatment. Scatter slash outside the brushing limits without damaging residual trees. Slash is defined as any material that has a length greater than 36 inches or a diameter greater than 2 inches at any point. Do not deposit material in streams, streambeds, culvert inlets or outlets, drainage ways, or cattle guards.

230.6 Acceptance. Roadside brushing will be evaluated under Subsection 106.02.

Measurement

230.7 Method. Measure the Section 230 items listed in the bid schedule according to Subsection 109.02 and the following.

Linear measurements will be horizontal along the road centerline.

Quantities will be the number of miles (or stations) and fractions thereof along the road centerline.

Payment

230.08. The accepted quantities will be paid at the contract price per unit of measurement for the section 230 pay items listed in the bid schedule. Payment will be full compensation for the work prescribed in this section. See Subsection 109.05.

230.00_0114_us_08_04_2005

Description

230.1 Work. This work consists of removing all vegetative material including limbs, residual slash, live roadside brush, and small trees within the brushing limits designated on the plans.

Construction

230.2 Brushing. Cut all brush and small trees (6 inches diameter, or less, at the point of cut) inside the brushing limits and outside the roadbed no higher than 4 inches above ground level (6 inches for machine brushing). If rocks or other obstructions are encountered, cut no higher than

Forest Service Supplemental Specifications to FP-03 for GTR Dunn Timber Sale
6 inches above the obstruction. Limb live trees with a diameter larger than 6 inches to provide a clear height of 14 feet above the road surface.

Cut all brush and trees located on the roadbed as nearly flush to the road surface as possible so stumps will not become a hazard to vehicle tires.

230.3 Windfalls. Limb windfalls lying within or across the brushing limits, cut off at the top of the existing cut slope or 5 feet from the shoulder on the fill slope. Dispose of windfall material as slash.

230.4 Road Junctions. Do not deposit brushing debris on the roadway of adjoining roads.

230.5 Slash Treatment. Scatter slash outside the brushing limits without damaging residual trees. Slash is defined as any material that has a length greater than 36 inches or a diameter greater than 2 inches at any point. Do not deposit material in streams, streambeds, culvert inlets or outlets, drainage ways, or cattle guards.

230.6 Acceptance. Roadside brushing will be evaluated under Subsection 106.02.

Measurement

230.7 Method. Measure the Section 230 items listed in the bid schedule according to Subsection 109.02 and the following.

Linear measurements will be horizontal along the road centerline.

Quantities will be the number of miles (or stations) and fractions thereof along the road centerline.

Payment

230.08. The accepted quantities will be paid at the contract price per unit of measurement for the section 230 pay items listed in the bid schedule. Payment will be full compensation for the work prescribed in this section. See Subsection 109.05.

251 - Riprap

251.00_01_us_10_11_2006

251.1 Description

Delete the first sentence and add the following:

This work consists of furnishing, hauling, and placing of riprap for bank protection, slope protection, drainage structures, erosion control, and other features shown on the plans.

251.2 Material.

Add the following:

When shown on the plans stone from the project site may be utilized.

251.07 Acceptance

Delete sampling and testing requirements of Table 251-1 and certification requirements of Subsection 106.03.

251.09 Payment.

Add the following:

The cost of excavation, embankment and haul required for placement of riprap is incidental to pay items listed in the bid schedule. No payment will be made under Item 251.

301 - Untreated Aggregate Courses

301.00_nat_us_03_03_2005

301 Title Change.

Change the title to: **Section 301 Aggregate Courses**

301.01_nat_us_03_03_2005

301.1 Work.

Add the following:

Work includes producing aggregate by pit-run, grid rolling, screening, or crushing methods, or placing Government-furnished aggregate. Work may include additive mineral filler, or binder.

301.02_nat_us_05_16_2005

301.2 Material.

Add the following:

Bentonite	725.30
Calcium Chloride Flake	725.02
Lignon Sulfonate	725.20
Magnesium Chloride Brine or Calcium Chloride Liquid	725.02

301.03_nat_us_02_28_2013

301.3 General.

Add the following:

Written approval of the roadbed is required before placing aggregate.

For pit run or grid-rolled material, furnish material smaller than the maximum size. No gradation other than maximum size will be required for pit-run or grid-rolled material. For grid rolling, use all suitable material that can be reduced to maximum size. After processing on the road, remove all oversize material from the road and dispose of it as directed by the CO.

Provide additives or binder, if required, at the proportions specified.

Develop and use Government furnished sources according to Section 105.

If the aggregate is produced and stockpiled before placement, handle and stockpiled according to Section 320. Establish stockpile sites at locations approved. Clear and grub stockpile sites according to Section 201.

301.4 Mixing and Spreading.

Delete the first sentence of the first paragraph and add the following:

Ensure that aggregate and any required additives, water, mineral filler, and binder are mixed by the specified method except, if crushed aggregate products are being produced and mineral filler, binder, or additives are required, uniformly blend following crushing. Control additive proportions to 0.5 percent dry weight.

(a) Stationary Plant Method. Mix the aggregate with other required materials in an approved mixer. Add water during the mixing operation in the amount necessary to provide the moisture content for compacting to the specified density. After mixing, transport the aggregate to the jobsite while it contains the proper moisture content, and place it on the roadbed or base course using an aggregate spreader.

(b) Travel Plant Method. After placing the aggregate for each layer with an aggregate spreader or windrow-sizing device, uniformly mix it with other required materials using a traveling mixing plant. During mixing, add water to provide the necessary moisture content for compacting.

(c) Road Mix Method. After placing the aggregate for each layer, mix it with other required materials at the required moisture content until the mixture is uniform throughout. Mix aggregate, water, and all other materials until a uniform distribution is obtained.

Spread the aggregate in a uniform layer, with no segregation of size, and to a loose depth that will provide the required compacted thickness.

When placing aggregate over geotextile, place aggregate in a single lift to the full depth specified.

Route and distribute hauling and leveling equipment over the width and length of each layer.

301.5 Compacting

Delete and replace with the following:

Compact each layer full width. Roll from the sides to the center, parallel to the centerline of the road. Along curbs, headers, walls, and all places not accessible to the roller, compact the material with approved tampers or compactors.

Compact the aggregate using one of the following methods as specified:

Compaction A. Operating spreading and hauling equipment over the full width of the travelway.

Compaction B. Operate rollers and compact as specified in Subsection 204.11(a)(1).

Compaction C. Moisten or dry the aggregate to a uniform moisture content between 5 and 7 percent based on total dry weight of the mixture. Operate rollers and compact as specified in Subsection 204.11(a)(1).

Compaction D. Compact to a density of at least 95 percent of the maximum density, as determined by AASHTO T 99, method C or D.

Compaction E. Compact to a density of at least 96 percent of the maximum density, as determined by the Modified Marshall Hammer Compaction Method (available upon request from USDA Forest Service, Regional Materials Engineering Center, P.O. Box 7669, Missoula, MT 59807).

Compaction F. Compact to a density of at least 95 per-cent of the maximum density, as determined by AASHTO T 180, method C or D.

Compaction G. Compact to a density of at least 100 percent of the maximum density as determined by the Modified Marshall Hammer Compaction Method (available upon request from USDA Forest Service, Regional Materials Engineering Center, P.O. Box 7669, Missoula, MT 59807).

For all compaction methods, blade the surface of each layer during the compaction operations to remove irregularities and produce a smooth, even surface. When a density requirement is specified, determine the in place density and moisture content according to AASHTO T 310 or other approved test procedures.

301.05_0114_us_03_07_2005

301.5 Compacting

Delete the first and third paragraphs and add the following:

Compact the aggregate using the following method as specified:

(c.) Determine the maximum density of the mixture according to AASHTO 180, method D.

Compact each layer to at least 95 percent of maximum density. Determine the in-place density and moisture content according to AASHTO T 310 or other approved test procedure.

(d.) Hauling and Spreading Equipment. Adjust the moisture content to a level suitable for compaction. Operate spreading and hauling equipment over the full width of each layer of the aggregate.

(e.) Roller Compaction. Adjust the moisture content to a level suitable for compaction. Operate rollers over the full width of each layer until visual displacement ceases, but not fewer than three complete passes. Use rollers that meet the following requirements:

(1) Steel wheeled rollers, other than vibratory, capable of exerting a force of not less than 250 pounds per inch of width of the compression roll or rolls.

(2) Vibratory steel wheeled rollers equipped with amplitude and frequency controls with a minimum weight of 6 tons, specifically designed to compact the material on which it is used.

(3) Pneumatic-tired rollers with smooth tread tires of equal size that will provide a uniform compacting pressure for the full width of the roller and capable of exerting a ground pressure of at least 80 psi.

301.06_nat_us_03_03_2005

301.6 Surface Tolerance.

Add the following:

Thickness and Width requirements:

The maximum variation from the compacted specified thickness is ½ inch. The compacted thickness is not consistently above or below the specified thickness and the average thickness of 4 random measurements for any ½ mile of road segment is within + ¼ inch of the specified thickness.

The maximum variation from the specified width will not exceed +12 inches at any point. The compacted width is not consistently above the specified width and the average of any four random measurements along any ½ mile of road segment is within +4 inches of the specified width.

301.08_nat_us_03_30_2005

301.08(b) Plasticity Index.

Add the following to the first sentence:

“and under 703.05(c)(1)”.

301.08_0114_us_08_04_2005

Table 301-1

Delete “From windrow or roadbed after processing” from row titled “Surface course aggregate” and “Point of Sampling” column

And add the following:

“From an approved sampling device on the crusher”

301.09_nat_us_07_07_2005

301.9 Measurement.

Replace the second paragraph with the following:

Measure aggregate by cubic yard compacted in place when payment is by contract quantities.

301.10_nat_us_03_03_2005

301.10 Payment

Delete the following:

adjusted according to Subsection 106.05

303 - Road Reconditioning

303.00_01_us_10_11_2006

Delete Section 303 in its entirety and replace with the following.

Description

303.01 This work consists of reconditioning ditches, shoulders, roadbeds, parking areas, turnouts, approach road intersections, cattleguards, asphalt surfaces and aggregate surfaces. Construct outlopes, clean and maintain all roadbed drainage structures when shown on the plans.

Material

303.2 Conform to the following Subsection:

Water 725.01

Construction Requirements

303.3 Ditch Reconditioning. Remove all slide material, sediment, vegetation, and other debris from the existing ditches and culvert inlets and outlets. Reshape ditches and culvert inlets and outlets to achieve positive drainage and a uniform ditch width, depth, and grade. Dispose of waste as shown on the plans.

303.4 Shoulder Reconditioning. Repair soft and unstable areas according to Subsection 204.07. Remove all slide material, vegetation, and other debris from existing shoulders including shoulders of parking areas, turnouts, and other widened areas. Dispose of waste as shown on the plans.

303.5 Roadbed Reconditioning Repair soft and unstable areas according to Subsection 204.7. Remove all organic, deleterious material larger than 6 inches from the top 6 inches of

Forest Service Supplemental Specifications to FP-03 for GTR Dunn Timber Sale

subgrade. Dispose of waste as shown on the plans. Scarify, rip and shape the traveled way and shoulders at locations and to the depth and width designated on the plans. Remove surface irregularities and shape to provide a uniform surface.

Dispose of rock larger than 4 inches brought to the surface during scarification in areas designated on the plans.

For portions of roads not requiring scarification, the roadbed may contain rocks larger than 4 inches provided they do not extend above the finished roadbed surface. Reduce in place or remove rock extending above the finished roadbed surface. Dispose of removed rock in areas designated on the plans.

Compact using the following method as specified:

(a)) Compaction A. Operate equipment over the full width.

(b) Compaction B. Operate rollers over the full width of each layer until visual displacement ceases, but not fewer than three complete passes. Use rollers that meet the following requirements:

(1) Steel wheeled rollers, other than vibratory, capable of exerting a force of not less than 250 pounds per inch of width of the compression roll or rolls.

(2) Vibratory steel wheeled rollers equipped with amplitude and frequency controls with a minimum weight of 6 tons, specifically designed to compact the material on which it is used.

(3) Pneumatic-tired rollers with smooth tread tires of equal size that will provide a uniform compacting pressure for the full width of the roller and capable of exerting a ground pressure of at least 80 psi.

303.6 Aggregate Surface Reconditioning. Repair soft and unstable areas to the full depth of the aggregate surface and according to Subsection 204.07. Scarify to the depth of the aggregate surface or to a depth of 8 inches, whichever is less, and remove surface irregularities. Reshape, finish, and compact the entire aggregate surface according to Section 308.

303.7 Roadway Reconditioning. Perform all the applicable work described in Subsections 303.03 through 303.06.

Maintain the existing cross slope or crown unless otherwise shown on the plans. Establish a blading pattern that will retain the surfacing on the roadbed and provide a through mixing of the materials within the completed surface width.

Blade and shape the subgrade for both surfaced and unsurfaced roads when moisture content is suitable for compaction.

303.8 Pulverizing. Scarify the surface to the designated depth and width. Pulverize all material to a size one and one half times the maximum sized aggregate or to 1½ inches, whichever is greater. Mix, spread, compact, and finish the material according to Section 301.

303.9 Acceptance. See Table 303-1 for sampling and testing requirements. Road reconditioning work will be evaluated under Subsections 106.02 and 106.04.

Measurement

303.10 Measure the Section 303 items listed in the Schedule of Items according to Subsection 109.02 and the following as applicable.

Measure ditch reconditioning and shoulder reconditioning by the mile, by the station or foot horizontally along the centerline of the roadway for each side of the roadway.

Measure roadbed reconditioning, aggregate surface reconditioning, roadway reconditioning, and pulverizing by the mile, by the station, or by the square yard.

Payment

303.11 The accepted quantities will be paid at the contract price per unit of measurement for the Section 303 pay items listed in the bid schedule. Payment will be full compensation for the work prescribed in this Section. See Subsection 109.05.

303.03_0114_us_08_04_2005

303.3 Ditch Reconditioning

Delete the last sentence and add the following:

Dispose of waste as shown on the plans.

303.4 Shoulder Reconditioning

Delete the last sentence and add the following:

Dispose of waste as shown on the plans.

303.5 Roadbed Reconditioning

Delete and add the following:

Repair soft and unstable areas according to Subsection 204.07. Remove all organic, deleterious material larger than 6 inches from the top 6 inches of subgrade. Dispose of waste as shown on the plans. Scarify and shape the traveled way and shoulders at locations and to the depth and width designated on the plans. Remove surface irregularities and shape to provide a uniform surface.

Dispose of rock larger than 4 inches brought to the surface during scarification in areas designated on the plans.

Forest Service Supplemental Specifications to FP-03 for GTR Dunn Timber Sale

For portions of roads not requiring scarification, the roadbed may contain rocks larger than 4 inches provided they do not extend above the finished roadbed surface. Reduce in place or remove rock extending above the finished roadbed surface. Dispose of removed rock in areas designated on the plans.

Compact using the following method as specified:

- (a)) Compaction A. Operate equipment over the full width.
- (b) Compaction B. Operate rollers over the full width of each layer until visual displacement ceases, but not fewer than three complete passes. Use rollers that meet the following requirements:
 - (1) Steel wheeled rollers, other than vibratory, capable of exerting a force of not less than 250 pounds per inch of width of the compression roll or rolls.
 - (2) Vibratory steel wheeled rollers equipped with amplitude and frequency controls with a minimum weight of 6 tons, specifically designed to compact the material on which it is used.
 - (3) Pneumatic-tired rollers with smooth tread tires of equal size that will provide a uniform compacting pressure for the full width of the roller and capable of exerting a ground pressure of at least 80 psi.

303.07 Roadway Reconditioning

Add the following:

Blade and shape the subgrade for both surfaced and unsurfaced roads when moisture content is suitable for compaction.

303.9 Acceptance

Delete the first sentence.

303.10 Measurement

Delete the first sentence of the third paragraph and replace with:

Measure roadbed reconditioning, aggregate surface reconditioning, roadway reconditioning, and pulverizing by the mile, by the station, or by the square yard.

306 - Dust Palliative

306.03_nat_us_03_02_2005

306.3 General.

Add the words “or rainy” after the word “foggy” in the third sentence.

306.04_nat_us_03_02_2005

306.4 Preparation and Application.

Add the following to the last paragraph:

When designated, begin compaction as soon as palliative has penetrated enough to prevent pickup of material. Operate rollers over the full width of each layer until visual displacement ceases.

306.06_nat_us_03_02_2005

306.6 Acceptance.

Add the following:

Submit certification and samples as specified in Table 306-1.

Add Table 306-1:

Table 306-1—Sampling and Testing.

Material or Product	Type of Acceptance (Subsection)	Characteristic	Test Method Specification	Sampling Frequency	Point of Sampling	Spilt	Reporting Time
	Production Certification (Subsection 106.03)	Chemical Composition	Subsection 725	1 per type of material	Source of materials	No	Prior to construction
		Toxicity Tests(1)	EPA Standard Operating Procedure 2022	“	“	“	“
		Specific Gravity Chart (2) (liquid non-petroleum products only)	-	“	“	“	“
		Material Safety Data Sheet	-	“	“	“	“
		Quality	-	First load and determined by the CO thereafter	Hauling vehicle (3)	Samples submitted to the Government	During construction

Note: 1) 96-Hour static toxicity test using Daphnia and juvenal rainbow trout (*Oncorhynchus mykiss*).

Forest Service Supplemental Specifications to FP-03 for GTR Dunn Timber Sale

- 2) Specific Gravity Chart: Correlation of Specific Gravity with percent solids of constituent presented in 1 percent increments beginning with a 5 percent solution up to, including, and exceeding 5 percent (or the solubility limit of the product) the proposed concentration of the undiluted product.
- 3) If the product is liquid, obtain a two-liter sample from the transfer load. If the product is solid obtain a 1-pound sample from the load.

322 - Minor Aggregate Courses

322.00_nat_us_10_14_2011

Description

322.01 This work consists of constructing one or more courses of aggregate on a prepared surface. Work includes producing aggregate by grid rolling, screening, or crushing methods, or placing pit-run or Government-furnished aggregate.

Surface aggregate grading is designated as shown in Table 703-3.

Subbase and base aggregate grading is designated as shown in Table 703-2.

Screened aggregate grading is designated as shown in Table 703-16.

Material

322.2 Conform to the following Subsections:

Aggregate	703.05
Water	725.01

Construction Requirements

322.3 General. Prepare the surface on which the aggregate course is placed according to Section 204 or 303 as applicable.

Request approval of the roadbed in writing before placing aggregate.

Develop, haul, and apply water in accordance to Section 170.

Submit target values within the gradation ranges shown in Table 703-2 or 703-3 for the required grading. After reviewing the proposed target values the CO will determine the final values for the gradation and notify the Contractor in writing.

No quality requirements or gradation other than maximum size will be required for pit run and grid-rolled material. For grid rolling, use all suitable material that can be reduced to maximum size.

After processing on the road, remove all oversize material from the road and dispose of it as directed by the CO.

If the aggregate is produced and stockpiled before placement, handle and stockpiled according to Section 320. Establish stockpile sites at approved locations.

322.4 Mixing and Spreading. Mix the aggregate and adjust the moisture content to obtain a uniform mixture with a moisture content suitable for the specified compaction method. Spread and shape the mixture on the prepared surface in a uniform layer with no segregation of size, and to a loose depth that will provide the required compacted thickness.

Do not place in layers exceeding 6 inches in compacted thickness for aggregate base and surface courses or twice the maximum particle size for screened aggregate. When more than one layer is necessary, compact each layer according to Subsection 322.05 before placing the next layer. Route hauling and leveling equipment uniformly over the full width.

When placing aggregate over geotextile, place aggregate in a single lift to the full depth specified.

322.5 Compacting. Compact each layer full width. Roll from the sides to the center, parallel to the centerline of the road. Along curbs, headers, walls, and all places not accessible to the roller, compact the material with approved tampers or compactors.

Compact the aggregate using one of the following methods as specified:

Compaction A. Operating spreading and hauling equipment over the full width of the travelway.

Compaction B. Operate rollers and compact as specified in Subsection 204.11(a)(1).

Compaction C. Moisten or dry the aggregate to a uniform moisture content between 5 and 7 percent based on total dry weight of the mixture. Operate rollers and compact as specified in Subsection 204.11(a)(1).

Compaction D. Compact to a density of at least 95 percent of the maximum density, as determined by AASHTO T 99, method C or D.

Compaction E. Removed.

Compaction F. Compact to a density of at least 95 per-cent of the maximum density, as determined by AASHTO T 180, method C or D.

Compaction G. Removed.

For all compaction methods, blade the surface of each layer during the compaction operations to remove irregularities and produce a smooth, even surface. When a density requirement is specified, determine the in place density and moisture content according to AASHTO T 310 or other approved test procedures.

322.6 Construction Tolerance. If grade finishing stakes are required, finish the surface to within ± 0.10 feet from staked line and grade elevation.

If grade finishing stakes are not required, shape the surface to the required template and check the surface with a 10-foot straightedge. Defective areas are surface deviations in excess of 1/2 inch in 10 feet between any two contacts of the straightedge with the surface.

Correct all defective areas by loosening the material, adding or removing material, reshaping, and compacting.

Ensure that the compacted thickness is not consistently above or below the specified thickness. The maximum variation from the compacted specified thickness is 1/2 inch.

Ensure that the compacted width is not consistently above the specified width. The maximum variation from the specified width will not exceed +12 inches at any point.

322.7 Maintenance. Maintain the aggregate course to the correct line, grade, and cross-section by blading, watering, rolling, or any combination thereof until placement of the next course. Correct all defects according to Subsection 322.06.

322.8 Acceptance. See Table 322-1 or Table 322-2 as applicable, for sampling and testing requirements.

Aggregate gradation and surface course plasticity index will be evaluated under Subsection 106.04. If the aggregate is obtained from a Government stockpile then the above characteristics will be evaluated under Subsection 106.02. Other aggregate quality properties will be evaluated under Subsections 106.02 and 106.04. Placement of aggregate courses will be evaluated under Subsections 106.02 and 106.04.

The allowable upper and lower aggregate gradation limits are the Target Value plus or minus the allowable deviations shown in Tables 703-2 and 703-3.

The allowable upper and lower Plasticity index limits for surface courses are stated in 703.05(b).

Preparation of the surface on which the aggregate course is placed will be evaluated under Section 204 or 303 as applicable.

Measurement

322.9 Measure the Section 322 items listed in the bid schedule according to Subsection 109.02 and the following as applicable.

Measure square yard width horizontally to include the top of aggregate width including designed widening. Measure the square yard length horizontally along the centerline of the roadway.

If the measurement for aggregate is by cubic yard using contract quantities then measure aggregate by the cubic yard in-place once compacted, otherwise measurement for aggregate by the cubic yard is measured by the cubic yard in the hauling vehicle.

Measure thickness perpendicular to the grade of the travelway.

Measure width perpendicular to the centerline.

Payment

322.10 The accepted quantities will be paid at the contract price per unit of measurement for the Section 322 pay items listed in the bid schedule. Payment will be full compensation for the work prescribed in this Section. See Subsection 109.05.

Table 322-1
Sampling and Testing Requirements

Material or Product	Type of Acceptance (Subsection)	Characteristic	Category	Test Methods Specifications	Sampling Frequency	Point of Sampling	Split Sample	Reporting Time
Aggregate source quality 703.05	Measured and tested for conformance (106.04 & 105)	LA abrasion (coarse)	—	AASHTO T 96	1 per type & source of material	Source of material	Yes, when requested	Before using in work
		Sodium sulfate soundness loss (coarse & fine)	—	AASHTO T 104	“	“	“	“
		Durability index (coarse & fine)	—	AASHTO T 210	“	“	“	“
		Fractured faces	—	ASTM D 5821	“	“	“	“
Subbase, Base, and Surface courses	Measured and tested for conformance (106.04)	Sample	—	AASHTO T 2	2 per day	From windrow or roadbed after processing or from approved crusher sampling device	Yes	48 hours

Table 322-1 (continued)
Sampling and Testing Requirements

Material or Product	Type of Acceptance (Subsection)	Characteristic	Category	Test Methods Specifications	Sampling Frequency	Point of Sampling	Split Sample	Reporting Time
Subbase, Base, and Surface	Measured and tested for conformance (106.04)	Moisture-density Method D	—	AASHTO T 99 ⁽¹⁾	1 per type and source of material	Source of material	Yes, when requested	Before using in work
			—		“	“	“	“
		Moisture-density Method F	—	AASHTO T 180 ⁽¹⁾	“	“	“	“
			—		“	“	“	“
		In-place density & moisture content	—	AASHTO T 310 or other approved procedures	3 per day	In-place	—	Before placing next layer

Table 322-2
Sampling and Testing Requirements

Material or Product	Type of Acceptance (Subsection)	Characteristic	Category	Test Methods Specifications	Sampling Frequency	Point of Sampling	Split Sample	Reporting Time
Screened Aggregate	Measured and tested for conformance (106.04)	Sample	—	AASHTO T 2	2 per day	From windrow or roadbed after processing or from approved crusher sampling device	Yes	48 hours

602 - Culverts and Drains

602.00_01_us_10_12_2006

602.03 General

Add the following:

Clean and paint damaged coating caused by welding, field cutting, or handling in accordance with AASHTO M 36M and ASTM A 849.

602.05 Laying Metal Pipe

Add the following:

Install helically corrugated lock-seam pipe with the seam at the inlet end placed below the horizontal centerline. This, requirement also applies to the outlet end, when less than 5 feet below subgrade.

602.03_0114_us_08_04_2005

602.03 General.

Delete second paragraph and add the following:

The lengths and locations of individual pipe “as shown on the plans” are approximate. Do not order pipe until culvert locations are designated on the ground and a written list of the correct lengths is approved by the C.O.

625 - Turf Establishment

625.00_0114_us_07_12_2007

625.3 General.

Delete the first sentence and add the following:

Apply turf establishment to portions of slopes, ditches, waste areas, and other disturbed areas within 14 days after being constructed to template lines unless otherwise specified in writing by the C.O..

625.4 Preparing Seedbed.

Delete the second sentence of the first paragraph.

Delete the third paragraph.

625.5 Watering

Delete the entire paragraph.

625.6 Fertilizing.

Delete the entire subsection and add the following.

Apply fertilizer having a chemical analysis as listed in (c) below by the following methods. Apply seed and fertilizer in one application.

(a) Dry Method. Apply the fertilizer with approved power driven seeders, drills, fertilizer spreaders or other mechanical equipment. Hand operated methods are satisfactory on areas inaccessible to mechanical equipment.

(b) Hydraulic method. Use hydraulic-type equipment capable of providing a uniform application using water as the carrying agent. Add fertilizer to the slurry and mix before adding seed.

(c) Chemical analysis. Apply fertilizer at the rate of 240 pounds per acre. Apply fertilizer having the following chemical analysis.

Nutrient	Percent
Nitrogen, N	<u>27</u>
Phosphorus, P ₂ O ₅	<u>10</u>
Potassium, K	<u>10</u>

Fertilizer having a different chemical analysis may be used if approved in advance by the CO.

625.7 Seeding.

Delete the first sentence and add the following.

Apply seed mix shown in (c) below by the following methods.

(a) Dry method.

Delete the third sentence.

Add the following after subsection (b).

(c)) **Seed Mix.** In terms of pure live seed, furnish and apply the following kinds and amounts of seed. Obtain the pounds of seed to furnish per acre by dividing the pounds of pure live seed required per acre by the product of the percent purity and percent germination.

Example: $\frac{5 \text{ lbs Pure Live Seed/Acre}}{0.90 \times 0.85} = 6.55 \text{ lbs Commercial Seed/Acre}$

0.90 X 0.85 (Purity = 90% and Germination = 85%)

<u>Kind of Seed</u>	<u>Quantity of Pure Live Seed</u> <u>(Lbs/Acre)</u>
1. Annual Rye	18
2. Hard Fescue	6
3. Orchard Grass	<u>6</u>
Total	30

625.8 Mulching.

(b) Hydraulic method.

Delete the first sentence and add the following.

Apply mulch in a separate application from the seed or in a single application with the seed using hydraulic-type equipment according to Subsection 625.07(b).

625.9 Protecting and Caring for Seeded Areas.

Delete the first sentence and add the following.

Protect and care for seeded areas until final acceptance.

625.11 Measurement

Delete the second paragraph and add the following.

Measure seeding, fertilizing, and mulching by the acre on the ground surface or by lump sum.

705 - Rock

705.02_01_us_10_12_2006

705.02 Riprap Rock

Delete the second sentence of this subsection. Additionally delete the requirements specified for (a), (b), and (c).

718 - Traffic Signing and Marking Material

718.05_nat_us_08_05_2009

718.05 Aluminum Panels

Delete the third paragraph and replace with the following:

Clean, degrease and properly prepare the panels according to methods recommended by the sheeting manufacturer. Conversion coatings will conform to ASTM B-921 or ASTM B-449.